




Cranked Bollard 1100mm Above Ground Galvanised, Galvanised and Colour & Stainless

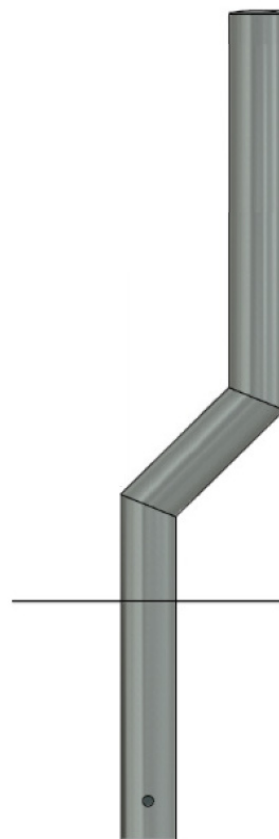

AUTOPA's range of Cranked Bollards are a substantial bollard, with a simple, clean appearance. Typically utilised and positioned strategically to protect corners of buildings and speaker posts etc. particularly at drive through restaurants.

Cranked Bollards are the preferred choice for prestigious sites as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

Manufactured from galvanised mild steel or grade 304 stainless steel, it is designed to look good on even the busiest sites for many years. Supplied ragged as standard.

Removable versions are also available.

Part Number	Description	Weight (kg)
138 121 350	101mm, Galvanised - Concrete In	13kg
138 121 351	101mm, Galvanised & Coated - Concrete In	13kg
138 121 351B	101mm, Galvanised & Black - Concrete In	13kg
138 121 351Y	101mm, Galvanised & Yellow - Concrete In	13kg
138 125 001	101mm, Stainless Steel Grade 304 - Concrete In	9kg
138 125 004	114mm, Stainless Steel Grade 304 - Concrete In	10kg

Product details

- 2mm wall thickness (stainless steel)
- 3mm wall thickness (galvanised mild steel)
- Concrete in 450mm (below ground)
- Grade 304 stainless steel

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

