

Plain Round Bollard 1500mm Above Ground 114mm - 219mm Diameter Galvanised & Yellow






AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Yellow bollards are suitable for use where high visability is paramount and can be used around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 114mm to 219mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Additional colour coated options and removable versions are also available.

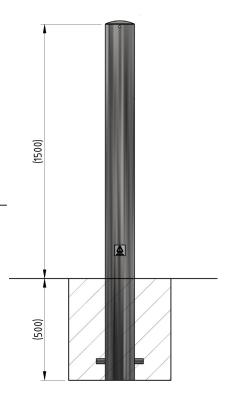

Part Number	<u>Description</u>	Weight (kg)
138 121 448Y	114mm Galvanised & Yellow - Concrete In	17kg
138 121 443Y	114mm Galvanised & Yellow - Bolt Down	14kg
138 121 619Y	139mm Galvanised & Yellow - Concrete In	35kg
138 121 625Y	139mm Galvanised & Yellow - Bolt Down	30kg
138 121 679Y	152mm Galvanised & Yellow - Concrete In	36kg
138 121 655Y	152mm Galvanised & Yellow - Bolt Down	32kg
138 121 714Y	168mm Galvanised & Yellow - Concrete In	40kg
138 121 711Y	168mm Galvanised & Yellow - Bolt Down	35kg
138 121 808Y	193mm Galvanised & Yellow - Concrete In	47kg
138 121 814Y	193mm Galvanised & Yellow - Bolt Down	40kg
138 121 908Y	219mm Galvanised & Yellow - Concrete In	54kg
138 121 917Y	219mm Galvanised & Yellow - Bolt Down	52kg

Product details

- 3mm wall thickness 114mm and 152mm diameters
- 5mm wall thickness 139mm 219mm diameters
- Concrete in 500mm (below ground)

- Round flange plate 180mm x 5mm 76mm to 114mm diameters
- Square flange plate 250mm sq x 10mm 127mm to 193mm diameters
- Square flange plate 400mm sq x 10mm 219 diameter

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk &44 (0)1788 550556

