




# GFC9000 1000mm Galvanised or Galvanised & Colour

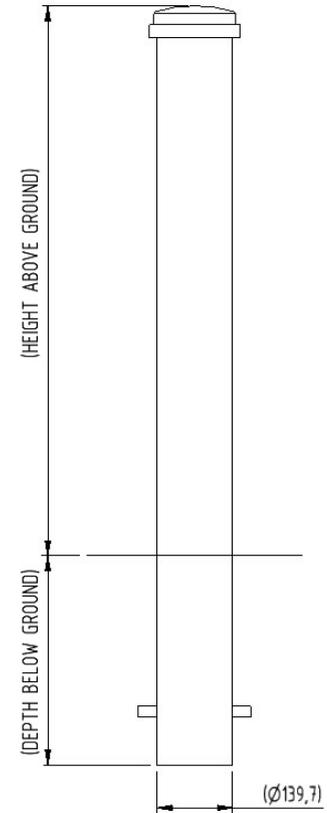

A substantial bollard, with a simple, clean appearance. The GFC9000 Ornamental Bollard is constructed using mild steel, galvanised to ensure its longevity. A decorative welded steel cap is added to complete the design.

This bollard is designed to work in combination with the GFC9000i Illuminated Bollard, where an illuminated version is not required. The bollards are available in a galvanised and a galvanised and coated finish. BS/RAL numbers must be specified at time of order.

Supplied ragged as standard, flanged and removable versions are also available. Removable bollards are secured to a ground socket by means of a padlock. Please ask for more information.

<u>Part Number</u>	<u>Description</u>	<u>Lift Weight (kg)</u>	<u>Weight (kg)</u>
138 122 601	Galvanised - Concrete In		24kg
138 122 600	Galvanised & Colour - Concrete In		24kg
138 122 602	Galvanised - Bolt Down		24kg
138 122 607	Galvanised - Removable	24kg	32kg

## Product details

- 1000mm height above ground
- 139mm diameter
- 5mm wall thickness
- Concrete in 400mm (below ground)
- Price excludes fixing down bolts and padlock to secure
- Socket - 300mm (below ground)

## Installation & use

Bolt down to a suitable concrete surface.  
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.  
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.  
Products are guaranteed for 12 months (if installed and used correctly).



[www.autopa.co.uk](http://www.autopa.co.uk)  
+44 (0)1788 550556

AUTOPA Limited  
Cottage Leap, Rugby, Warwickshire CV21 3XP

