

SECUWALK  
WALKWAY MAT

Secuwalk is the perfect solution for safe access to rooftop services. It is easy to install, maintenance-free and does not react with the existing roof surface. It provides a high quality, slip-resistant surface to allow essential works to be carried out on flat rooftops whatever the weather.

MAIN BENEFITS:

- High slip resistance
- Good drainage
- Flexible to cover roof imperfections
- Protection of roof from foot traffic
- Quick and easy to install
- Maintenance-free

Secuwalk is constructed from PVC and available in three roll widths: 60cm, 91cm or 122cm. All of the rolls are 10 metres long and the grid stands at 14mm high. Secuwalk matting is available in standard colours of light grey, yellow and black.

Size and weight	Length 0+.03	Height +/- 0.5	Widths in cm			Weight
	Metres	Millimetres	+/- 1			Kg/m <sup>2</sup>
	10	14	60	91	122	6.6

GENERAL

**APPEARANCES:** Open grid “duckboard” design with cross-directional top ribs.

**COLOURS:** Available in standard colours; Light Grey, Yellow and Black.




Other colours available on request

**DURABILITY:** One-piece welded construction for long life and minimal maintenance.

**INSTALLATION:** Loose laid. PVC ramp edging available in 6cm and 10cm width, for use with Secuwalk.

**WORKABILITY:** Available in rolls for easy installation. Flexible Construction, is easy to cut and shape on site.

**USES:** Specifically engineered for roof walkways. Does lend itself to other industrial uses.

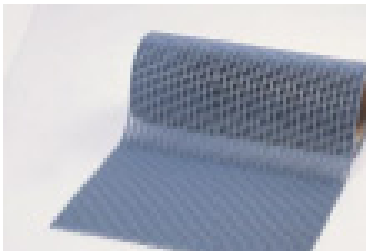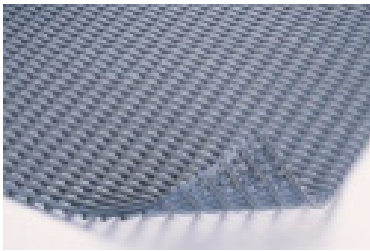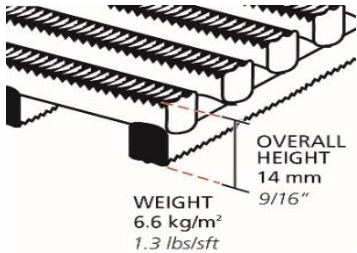

# Datasheet

## SECUWALK WALKWAY MAT



ACOUSTIC	Excellent sound absorption properties
CHEMICAL	Resistant to most acids, alkalines and oils
COMPOSITION	Flexible DINP plasticised Polyvinyl Chloride ( PVC )
ENVIRONMENT	The manufacturer does not use any substances currently included in the SVHC (substances of Very High Concern) list under R.E.A.C.H. in any matting products. All PVC grid products are 100% recyclable
FIRE	EN13501-1:2007-Cfl 1-S1
HYGIENE	Non-porous 100% Virgin PVC – Inhibits the growth of bacteria
REVERSION	Thermoplastic shrinkage can result in size reductions of up to 2%. Accelerated in hot environments
SLIP RESISTANCE	ASTM F 1677 (Dry/Wet)    IN 51130    (0.6/0.5)    R10, V10
THERMAL	Functional -23°C + 60°C (slight size variation may occur at temperature extremes)
UV LIGHT	Resistant to PVC degradation; uncoloured PVC material BS EN607=Delta E1.02
WARRANTY	5 years manufacturers warranty – Please ask for further details and terms
WIND STABILITY	Remained stable in wind speeds up to 94mph (150 Km/h) when loose laid in laboratory conditions on a flat stable platform at the University of Hertfordshire, School of Aero-space, Automotive & Design Engineering.