


ParaFlex G120 Reinforcement Fleece

Product Data Sheet

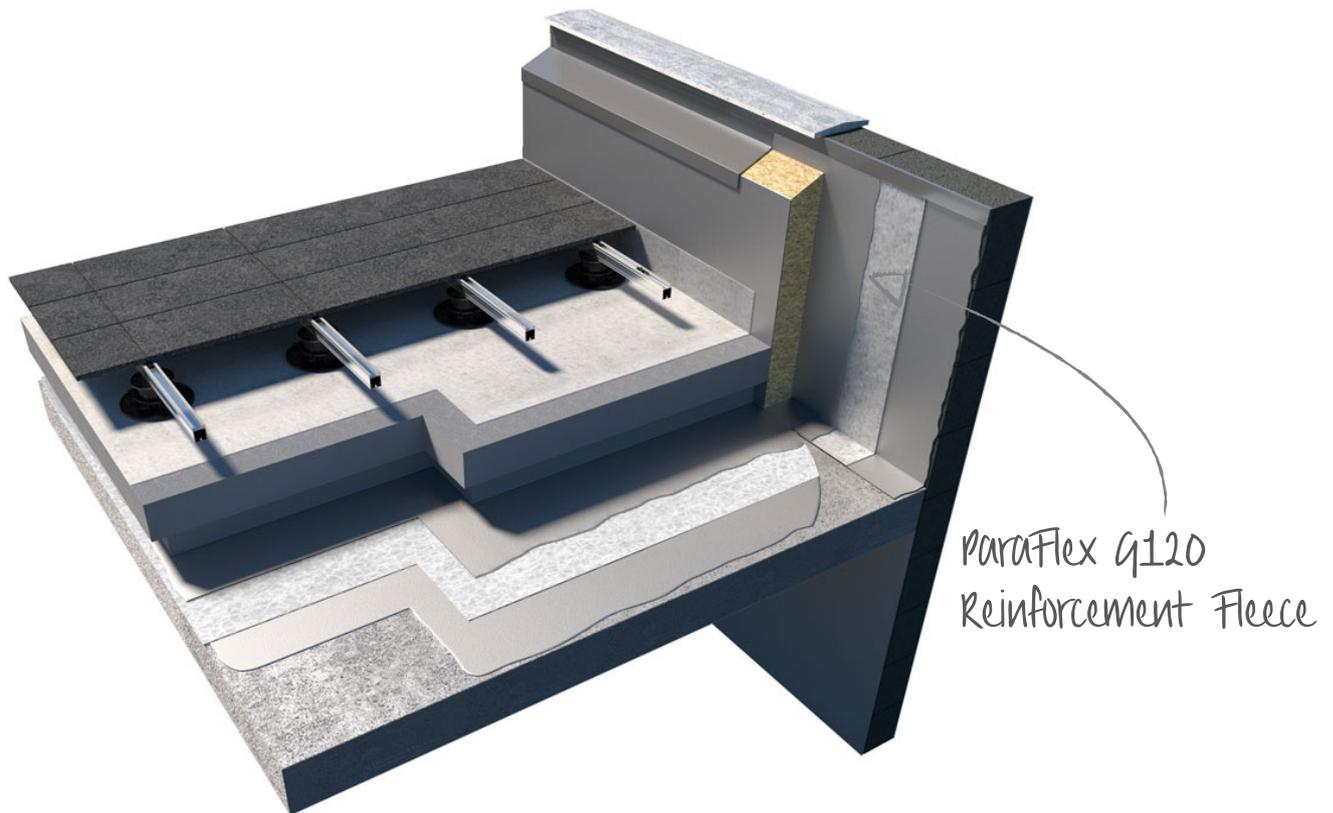

ReadySeal

G120 Reinforcement Fleece

General Information

Radmat G120 Reinforcement Fleece a reinforcing membrane for use with ParaFlex cold liquid applied waterproofing system.

For a comprehensive NBS J31 specification contact Radmat Building Products.

Installation Instructions

Embed reinforcement fleece into ParaFlex immediately after the first coat, ensuring a smooth application by carefully using a soft brush. Ensure each roll of Fleece overlaps the previous by at least 75mm. Install in accordance with the Directions of Application in the ParaFlex Waterproofing Membrane Product Data Sheet.

Delivery conditions

Delivery

On a pallet.

Storage and shelf life

Packed rolls must be stored stood on end on a dry and flat level surface.

Store temperature is between -10 and 50° C.

PRODUCT DESCRIPTION

| | |
|-------------------|------------------------|
| Appearance | White polyester fleece |
|-------------------|------------------------|

DECLARED PERFORMANCE

| Essential characteristics | Performance | Unit |
|---------------------------|---------------------|------------------|
| Material | Polyester | - |
| Colour | White | - |
| Weight | 120 | g/m ² |
| Length | 50 | m |
| Width | 250/350/500/700/105 | mm |
| Tensile Strength MD | 270 | kN/m |
| Tensile Strength CD | 250 | kN/m |
| Elongation MD | 50 | % |
| Elongation CD | 90 | % |

This information given in good faith and is based on the latest knowledge available to Radmat Building products Ltd. Whilst every effort has been made to ensure that the contents of the publication are current while going to press, customers are advised that products, techniques and codes of practice are under constant review and liable to change without notice.

For further information on Radmat products and services please call **01858 410372**, email techenquiries@radmat.com or visit our website www.radmat.com

NOV 20