


PipePockets

Product Data Sheet





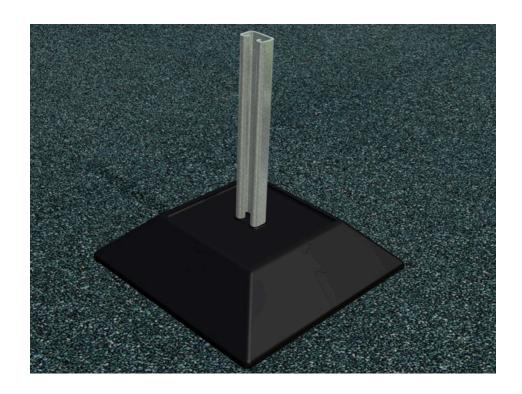

PipePockets

For sealing flat roof penetrations

General Information

Radmat PipePockets provide quick and easy method of creating a 50mm deep waterproof pitch pocket, a method of waterproofing small or irregular shaped penetrations. Manufactured from polyurethane elastomer, Radmat PipePockets consist of pre-formed elements for simple site assembly prior to being filled with PPR-5000 sealer, a fast setting solvent-free multi-use flexible sealant. Suitable for use with PermaQuik, EshaFlex, EshaGum and EshaUniversal.

Applications

For sealing small, irregular shaped or difficult to detail penetrations on PermaQuik, EshaFlex, EshaGum and EshaUniversal roofing systems



| Code | Internal Dimension (mm) | To suit pipe diameters (mm) |
|--------|-------------------------|---|
| PP-100 | 100 | 0-60 |
| PP-150 | 150 | 0-110 |
| PP-200 | 200 | 0-160 |
| | | Minimum 20mm of sealer between penetration and inside of PipePocket |



CodeDescription (mm)PP-ICInside CornerPP-OCOutside CornerPP-S-150Straight 150mmPP-S-250Straight 250mmPP-S-300Straight 300mm



| SEELEX-BI | Geelow E |
|-----------|---|
| PPR-5000 | Rodmat Problem Radmat Problem Problem |

| Code | Description | Instructions | |
|-----------|---|---|--|
| SEELEX-BI | 300ml cartridge | Apply with skeleton gun to bond PipePocket to roof surface, seal the tongue and groove joint, and interface between pipe or penetration and existing roof surface | |
| PPR-500 | Part A 3.86 kg/3420ml Part B 1.28kg/1030ml | | |
| PPR-JUG | Jug for dispensing PPR-5000 | Pour contents of Part B into part A. Thoroughly mix for 3-5 mins using PPR-whisk with a drill | |
| PPR-WHISK | Whisk for mechanically mixing two components | | |

PPR-JUG / WHISK



PipePocket kits

| Code | Contents |
|---------|--|
| PPK-150 | 8 x PP-OC, 8 x PP-S-150, 2 x LPS Sealant |
| PPK-250 | 8 x PP-OC, 8 x PP-S-250, 2 x LPS Sealant |
| PPK-300 | 8 x PP-OC, 8 x PP-S-300 2 x LPS Sealant |

This information given in good faith and is based on the latest knowledge available to Radmat Building products Ltd. Whilst every effort has been made to ensure that the contents of the publication are current while going to press, customers are advised that products, techniques and codes of practice are under constant review and liable to change without notice.

For further information on Radmat products and services please call 01858 410372, email techenquiries@radmat.com or visit our website www.radmat.com


NOV 2019

PipePockets

For sealing flat roof penetrations

Application guide


Ensure substrate is dry and clear of any loose gravel, dust granules or any foreign substances that can affect adhesion. The PPR 5000 (Parts A and B) should be kept at room temperature prior to use. PipePockets should not be installed or used in temperatures below 5°C. PipePockets are unable to accommodate any movement between finished base and the deck where installed.




Place PipePocket with at least 20mm clearance between inside of pocket and penetration.



Mark around outside edge of PipePocket for reference.




Seal base of penetration with LPS/Seelex BI and also apply a liberal bead to the substrate.




Ensure base of penetration is sufficiently sealed.



Apply LPS/Seelex BI in the joint(s) of the PipePocket.




Set PipePocket in place. Apply equal pressure to ensure positive contact with substrate.



Wipe away excess sealant.



Pour contents of PPR-5000 (Part B) bottle into PPR-5000 (Part A) tin. Thoroughly mix the two components for 3-5 mins using PPR-WHISK with a power drill.



Dispense PPR 500 into assembled PipePocket using PPR-JUG until full.

This information given in good faith and is based on the latest knowledge available to Radmat Building products Ltd. Whilst every effort has been made to ensure that the contents of the publication are current while going to press, customers are advised that products, techniques and codes of practice are under constant review and liable to change without notice.

For further information on Radmat products and services please call 01858 410372, email techenquiries@radmat.com or visit our website www.radmat.com

NOV 2019