

# IGUANA ANGULA PLUS

## WARMTH WITH A SYMBOLIC VALUE

Inspired by a child's drawing, an interpretation of the brightly shining sun, transformed into a fully functional work of art.

A radiator around the corner. Great capacity in a small space. A special solution, both energy-wise and aesthetically!



design award  
winner



RESPECT  
NATURE




jaga

PRESENTING IGUANA ANGULA PLUS



# IGUANA ANGULA PLUS

DIMENSIONS (in mm)

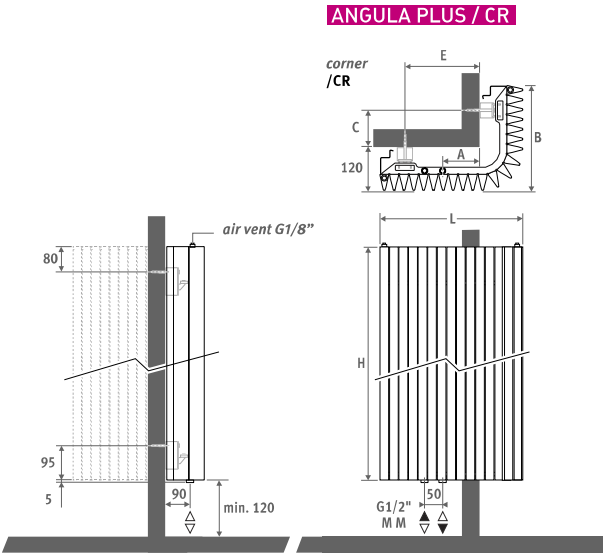

## DELIVERY

Product is made to order, please contact our customer service team on 01531 631 533 to discuss your requirements.

## COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:


- traffic white RAL 9016 (333), smooth satin matt
- sandblast grey (001), fine texture metallic

Other colours: see colour chart.

## CONNECTION

Top connection: specify code 45 or 54 instead of MM (first number is flow).

No insert pipe should be ordered. Provide an air vent on the central heating pipework.




## VALVES

See page 182.



## ANGULA PLUS / CL



| L   | A   | B   | C   | E   |
|-----|-----|-----|-----|-----|
| 400 | 105 | 290 | 100 | 210 |
| 455 | 130 | 345 | 155 | 265 |
| 510 | 160 | 400 | 210 | 320 |

*Iguana*<sup>+</sup>  
COLLECTION  
40% more warmth

# HEIGHT 1800-2400 - OUTPUT TABLES

| ANPW.HHH.LLL.XXX/MM/XX |                         |       | ANPW.HHH.LLL.XXX/MM/XX |                         |       |
|------------------------|-------------------------|-------|------------------------|-------------------------|-------|
|                        | HEIGHT 1800 ANGULA PLUS |       |                        | HEIGHT 2200 ANGULA PLUS |       |
| L                      | Watts                   | Watts | L                      | Watts                   | Watts |
| mm                     | 75/65                   | 55/45 | mm                     | 75/65                   | 55/45 |
| 400                    | 1745                    | 873   | 400                    | 1987                    | 1010  |
| 460                    | 2078                    | 1040  | 460                    | 2355                    | 1203  |
| 510                    | 2410                    | 1206  | 510                    | 2732                    | 1396  |
|                        | HEIGHT 1920 ANGULA PLUS |       |                        | HEIGHT 2400 ANGULA PLUS |       |
| L                      | Watts                   | Watts | L                      | Watts                   | Watts |
| mm                     | 75/65                   | 55/45 | mm                     | 75/65                   | 55/45 |
| 400                    | 1823                    | 918   | 400                    | 2066                    | 1066  |
| 460                    | 2170                    | 1093  | 460                    | 2460                    | 1270  |
| 510                    | 2517                    | 1267  | 510                    | 2854                    | 1473  |

EN442 output at 20°C room temperature